

Features



- The highest impact force and the deepest erosion for more efficient scale removal.
- Lower water consumption with the same impact of existing descaling nozzles.
- Sharper spray edge definition for optimized descaling performance.
- The DNEXR type for high wear resistance based on a trumpet-shaped orifice is available.



Maximum working pressure

- 25 MPa

Shapes & dimensions

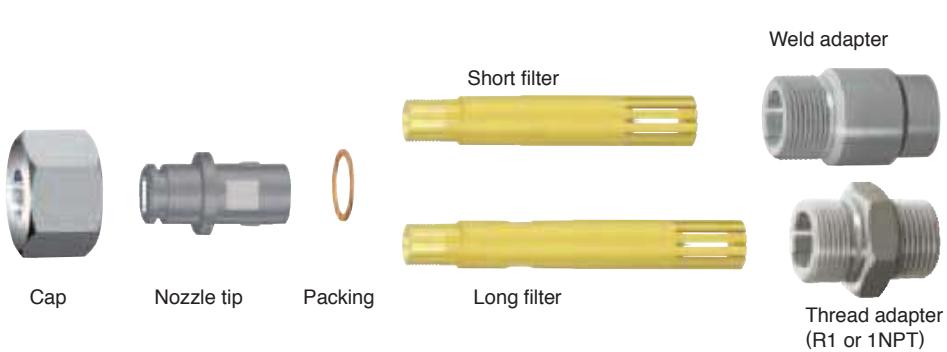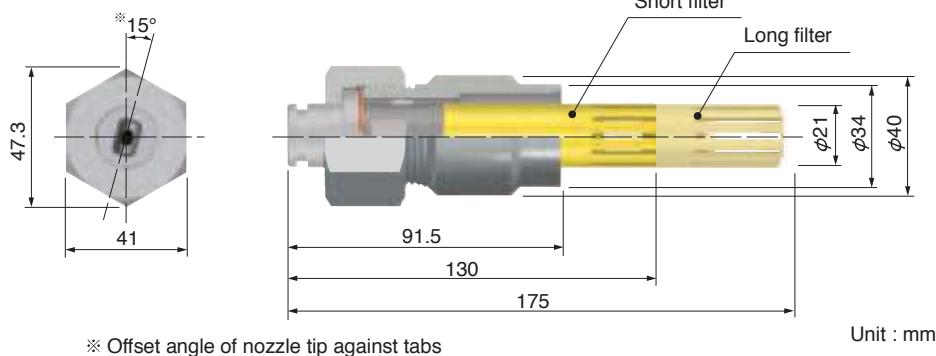

| Part | Material | Weight [g] |
|----------------|---------------------------|------------|
| Cap | 303 Stainless steel | 150 |
| Nozzle tip | Tungsten carbide & 303 SS | 100 |
| Packing | Copper | 4 |
| Short filter | Brass & 303 SS | 170 |
| Long filter | Brass & 303 SS | 215 |
| Weld adapter | 304 Stainless steel | 255 |
| Thread adapter | 304 Stainless steel | 215 |